


NZ - NZX

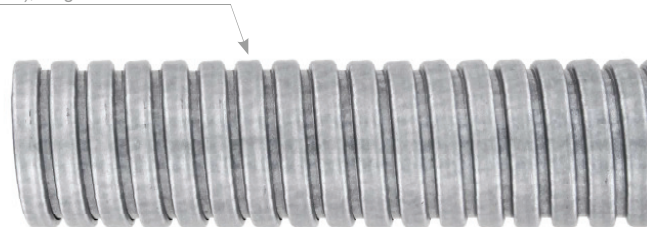

Ausführung construction	Metallschlauch, einfach verklammert metal conduit, single seam	
Werkstoff material	Stahl verzinkt (NZ) Edelstahl 1.4301 (NZX) galvanised steel (NZ) stainl. steel AISI 304 (NZX)	
Temperatur temperature	-60°C - +250°C (NZ) -60°C - +600°C (NZX)	
Schutzart protection	IP50	
gemäß according to	IEC EN 61386	
Passende Verschraubungen suitable fittings	NMF	24
Seite page	NMG	25
	SVMF	26
	SVMG	27

Metallschlauch aus verzinktem Stahl (NZ),
Edelstahl (NZX), einfach verklammert
metal conduit made of galvanised steel (NZ),
stainless steel (NZX), single seam

Eigenschaften
properties

flexibel - zugfest - hohe Scheiteldruckfestigkeit - hohe Schlagfestigkeit - Korrosionsschutz (NZX)
flexible - stretch resistant - high compressive strength - high impact strength - stainless steel (NZX)

Anwendungen
application

Maschinenbau
machine-building ✓

Elektroinstallation
electro-installation ✓

Fahrzeugbau
automotive ✓

EMV-Anwendungen
EMC-application

Automation
automation ✓


Bahn
railway ✓

Schiffsbau
shipbuilding ✓

EX-Anwendungen
EX-application ✓

Art. Nr. art. no.	Art. Nr. art. no.	NW DN	ID mm	AD mm OD mm	Biegeradius mm bending radius mm +/- 15 %	VPE unit
NZ07	NZX07	7	7,0	9,0	16	100m
NZ08	NZX08	8	8,0	11,0	16	50m
NZ09	NZX09	9	9,0	11,5	18	50m
NZ10	NZX10	10	10,0	13,0	19	50m
NZ11	NZX11	11	11,0	14,0	20	50m
NZ12	NZX12	12	12,0	15,0	22	50m
NZ13	NZX13	13	13,0	16,0	24	50m
NZ14	NZX14	14	14,0	17,0	25	50m
NZ15	NZX15	15	15,5	18,5	27	50m
NZ17	NZX17	17	17,0	19,0	30	50m
NZ18	NZX18	18	18,0	21,5	30	50m
NZ20	NZX20	20	20,5	24,0	33	50m
NZ21	NZX21	21	21,0	24,5	35	50m
NZ25	NZX25	25	25,0	28,5	41	50m
NZ27	NZX27	27	26,5	30,0	43	50m
NZ28	NZX28	28	28,0	31,5	45	50m
NZ30	NZX30	30	30,0	33,5	49	25m
NZ35	NZX35	35	35,0	39,5	127	25m
NZ37	NZX37	37	37,0	41,3	134	25m
NZ40	NZX40	40	40,0	44,3	144	25m
NZ45	NZX45	45	45,0	49,3	161	25m
NZ50	NZX50	50	50,5	54,8	178	25m

Einfache Verklammerung
single seam



Für CM-Serie: Einschraubset
EESO - BCM - NZ
for CM-series: screw-in set
EESO - BCM - NZ