






# K-KV-FIX - FRONTFIX

<b>Ausführung</b> construction	Schnellmontage fast installation
<b>Werkstoff</b> material	Polyamid 6 / NBR polyamide 6 / NBR
<b>Temperatur</b> temperature	-20°C - +100°C
<b>Kurzzeitig</b> short term	-30°C - +150°C
<b>Schutzart</b> protection	IP68
<b>Besonderheit:</b> specials.	Montierbar in metrischen Durchgangsbohrungen can be installed in metric wholes

FRONTFIX

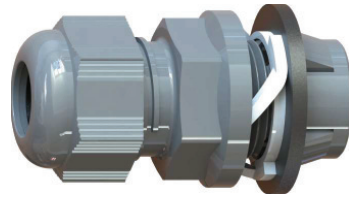

K-KV-FIX

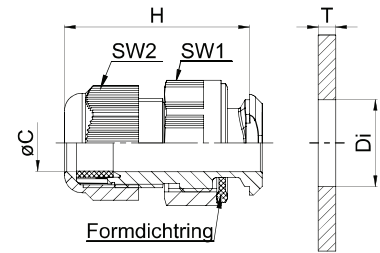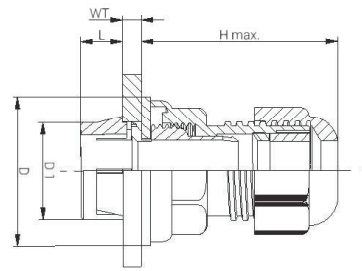

...FIXB... = schwarz / black / RAL9005

...FIX... = grau / grey / RAL7001

...FIXG... = hellgrau / light grey / RAL7035

## K-KV-FIX


Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW1 mm	SW2 mm	Wandstärke T wall thickness T mm	H mm	VPE Stk. unit pcs.
K-KVFIX...M1610	M16	5,0 - 10,0	24	20	1,0 - 4,0	38,5	100
K-KVFIX...M2012	M20	8,0 - 13,0	26	24	1,0 - 4,0	42,5	100
K-KVFIX...M2517	M25	11,0 - 17,0	32	29	1,0 - 4,0	48,0	50

## FRONTFIX

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW1 mm	SW2 mm	GL mm	H mm	VPE Stk. unit pcs.
K-FFIX...M1610	M16	5,0 - 10,0	22	22	9,0	4,25	100
K-FFIX...M2012	M20	6,0 - 12,0	24	24	9,0	41,5	50
K-FFIX...M2013	M20	7,0 - 13,0	25	25	9,0	41,5	50
K-FFIX...M2517	M25	11,0 - 17,0	29	29	9,0	43,5	25
K-FFIX...M3221	M32	15,0 - 21,0	36	36	9,0	49,5	25
K-FFIX...M4028	M40	19,0 - 28,0	46	46	11,5	56,0	20

## FRONTFIX - UNLOK

Art. Nr. art. no.	Größe size	D mm	D2 mm	H mm	VPE Stk. unit pcs.
UNLOK16	M16	16	20	13	10
UNLOK20	M20	20	24	13	10
UNLOK25	M20	25	29	13	10
UNLOK32	M25	32	36	13	10
UNLOK40	M32	40	44	15,5	10

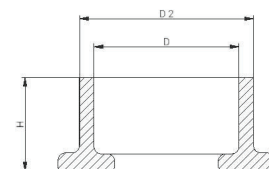

Demontagewerkzeug  
disassembling tool