


K-Blue Clean



Ausführung construction	Hygiene / Lebensmittel hygienic / food
Werkstoff material	Polyamid 6 / TPU / SI polyamide 6 / TPU / SI
Temperatur temperature	-20°C - +110°C
Kurzzeitig short term	-
Schutzart protection	IP68
Besonderheit: specials.	Entspricht den Anforderungen an die Hygienetauglichkeit und Reinigung. Complies with requirements of hygiene and cleaning.

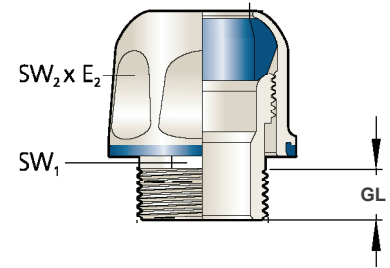

TPU -20°C - +85°C

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW1 mm	SW2 mm	GL mm	H mm	VPE Stk. unit pcs.
K-BGCM16	M16	7,0 - 9,0	14	22	9,0	34,0	5
K-BGCM20	M20	9,0 - 12,0	18	26	9,0	39,0	5
K-BGCM25	M25	12,0 - 15,0	24	32	10,0	40,0	5
K-BGCM25	M25	15,0 - 18,0	24	32	10,0	40,0	5
K-BGCM32	M32	18,0 - 21,0	30	38	11,0	43,0	5
K-BGCM32	M32	20,0 - 23,0	30	38	11,0	43,0	5

SI -20°C - +110°C

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW1 mm	SW2 mm	GL mm	H mm	VPE Stk. unit pcs.
K-BGCM16HT	M16	7,0 - 9,0	14	22	9,0	34,0	5
K-BGCM20HT	M20	9,0 - 12,0	18	26	9,0	39,0	5
K-BGCM25HT	M25	12,0 - 15,0	24	32	10,0	40,0	5
K-BGCM25HT	M25	15,0 - 18,0	24	32	10,0	40,0	5
K-BGCM32HT	M32	18,0 - 21,0	30	38	11,0	43,0	5
K-BGCM32HT	M32	20,0 - 23,0	30	38	11,0	43,0	5