


X-Blueclean



Ausführung construction	Hygiene / Lebensmittel hygienic / food
Werkstoff material	Edelstahl stainless steel
Dichtring sealing	TPU SI (HTS)
Temperatur temperature	-40°C - +85°C (TPU) -45°C - +150°C (HTS)
Schutzart protection	IP69K

Besonderheit:
specials:

Verschraubung mit Vollgummi-Dicht-einsatz.
Cable gland with solid rubber clamping insert.

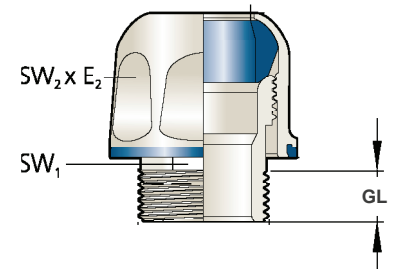

Gewindeart metrisch

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW mm	GL mm	H mm	VPE Stk. unit pcs.
X-BGCM0804	M8	4,0 - 4,5	7	4,5	15	5
X-BGCM1007	M10	5,0 - 7,0	10	6,0	19	5
X-BGCM1205	M12	3,5 - 5,0	10	7,0	19	5
X-BGCM1207	M12	5,0 - 7,0	10	7,0	19	5
X-BGCM1609	M16	7,0 - 9,0	14	9,0	21	5
X-BGCM2012	M20	9,0 - 12,0	9	9,0	27	5
X-BGCM2012L	M20	9,0 - 12,0	19	15,0	27	5
X-BGCM2515	M25	12,0 - 15,0	24	10,0	27	5
X-BGCM2518	M25	15,0 - 18,0	24	10,0	27	5
X-BGCM2518L	M25	15,0 - 18,0	24	15,0	27	5
X-BGCM3221	M32	18,0 - 21,0	30	11,0	27	5
X-BGCM3223	M32	20,0 - 23,0	30	11,0	27	5
X-BGCM4026	M40	23,0 - 26,0	36	11,0	32	4
X-BGCM4029	M40	26,0 - 29,0	36	11,0	32	4

HTS

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW mm	GL mm	H mm	VPE Stk. unit pcs.
X-BGCM0804HTS	M8	4,0 - 4,5	7	4,5	15	5
X-BGCM1007HTS	M10	5,0 - 7,0	10	6,0	19	5
X-BGCM1207HTS	M12	5,0 - 7,0	10	7,0	19	5
X-BGCM1609HTS	M16	7,0 - 9,0	14	9,0	21	5
X-BGCM2012HTS	M20	9,0 - 12,0	9	9,0	27	5
X-BGCM2515HTS	M25	12,0 - 15,0	24	10,0	27	5
X-BGCM2518HTS	M25	15,0 - 18,0	24	10,0	27	5
X-BGCM3223HTS	M32	20,0 - 23,0	30	11,0	27	5
X-BGCM4029HTS	M40	26,0 - 29,0	36	11,0	32	4
X-BGCM5037HTS	M50	35,0 - 37,0	46	11,0	34	1
X-BGCM6345HTS	M63	43,0 - 45,0	60	11,0	33,0	1
X-BGCM6356HTS	M63	54,5 - 56,5	60	11,0	33,0	1