


Ausführung construction	Reduzierung gerändelt reducer knurled
Werkstoff material	Messing vernickelt nickel-plated brass
Temperatur temperature	bis +200°C up to +200°C

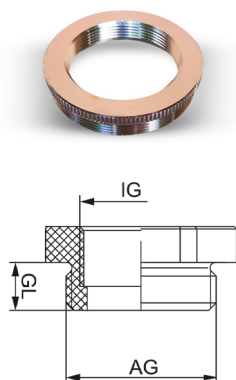

metrisch / metric

Art. Nr. art. no.	AG male	IG female	L mm	GL / AG mm	VPE Stk. unit pcs.
M-REDM1612	M16	M12	8,5	6,0	100
M-REDM2012	M20	M12	8,5	6,0	100
M-REDM2016	M20	M16	9,0	6,5	100
M-REDM2512	M25	M12	10,5	7,5	50
M-REDM2516	M25	M16	10,0	7,0	50
M-REDM2520	M25	M20	10,0	7,0	50
M-REDM3216	M32	M16	11,5	8,0	50
M-REDM3220	M32	M20	11,5	8,0	50
M-REDM3225	M32	M25	11,5	8,0	25
M-REDM4020	M40	M20	12,0	8,0	25
M-REDM4025	M40	M25	11,5	8,0	25
M-REDM4032	M40	M32	11,5	8,0	25
M-REDM5025	M50	M25	13,0	9,0	10
M-REDM5032	M50	M32	12,5	9,0	10
M-REDM5040	M50	M40	12,5	9,0	10
M-REDM6332	M63	M32	14,0	10,0	10
M-REDM6340	M63	M40	14,0	10,0	10
M-REDM6350	M63	M50	14,0	10,0	10

PG

Art. Nr. art. no.	AG male	IG female	L mm	GL / AG mm	VPE Stk. unit pcs.
M-REDPG0907	PG09	PG07	8,5	6,0	100
M-REDPG1107	PG11	PG07	8,5	6,0	100
M-REDPG1109	PG11	PG09	8,5	6,0	100
M-REDPG1307	PG13,5	PG07	9,0	6,5	100
M-REDPG1309	PG13,5	PG09	9,0	6,5	100
M-REDPG1311	PG13,5	PG11	9,0	6,5	100
M-REDPG1607	PG16	PG07	9,5	6,5	100
M-REDPG1609	PG16	PG09	9,5	6,5	100
M-REDPG1611	PG16	PG11	9,5	6,5	100
M-REDPG1613	PG16	PG13,5	9,5	6,5	100
M-REDPG2111	PG21	PG11	10,0	7,0	100
M-REDPG2113	PG21	PG13,5	10,0	7,0	100
M-REDPG2116	PG21	PG16	10,0	7,0	100
M-REDPG2916	PG29	PG16	11,5	8,0	50
M-REDPG2921	PG29	PG21	11,5	8,0	50
M-REDPG3621	PG36	PG21	12,5	9,0	25
M-REDPG3629	PG36	PG29	12,5	9,0	25
M-REDPG4229	PG42	PG29	14,0	10,0	10
M-REDPG4236	PG42	PG36	14,0	10,0	10
M-REDPG4836	PG48	PG36	14,0	10,0	10
M-REDPG4842	PG48	PG42	14,0	10,0	10

- L Länge gesamt / overall length
- GL Gewindelänge / thread length
- AG Außengewinde / male thread
- IG Innengewinde / female thread
- SW Schlüsselweite / key-width
- H Höhe / height
- ID Innendurchmesser / inside diameter

