


M-REDS



Ausführung construction	Reduzierung Sechskant reducer hexagon
Werkstoff material	Messing vernickelt nickel-plated brass
Temperatur temperature	bis +200°C up to +200°C

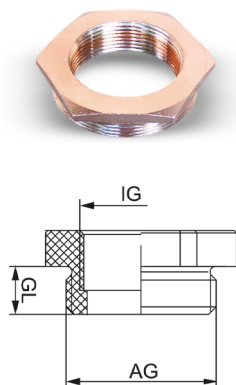

metrisch / metric

Art. Nr. art. no.	AG male	IG female	L mm	GL / AG mm	SW mm	VPE Stk. unit pcs.
M-REDSM1612	M16	M12	8,5	6,0	18	50
M-REDSM2012	M20	M12	9,0	6,5	22	50
M-REDSM2016	M20	M16	9,0	6,5	22	50
M-REDSM2512	M25	M12	10,5	7,5	27	50
M-REDSM2516	M25	M16	10,0	7,0	28	50
M-REDSM2520	M25	M20	10,0	7,0	28	50
M-REDSM3216	M32	M16	11,0	8,0	35	50
M-REDSM3220	M32	M20	11,5	8,0	35	50
M-REDSM3225	M32	M25	11,5	8,0	35	25
M-REDSM4020	M40	M20	12,0	8,0	43	25
M-REDSM4025	M40	M25	12,5	8,0	43	25
M-REDSM4032	M40	M32	12,5	8,0	43	25
M-REDSM5025	M50	M25	14,0	10,0	54	10
M-REDSM5032	M50	M32	14,0	10,0	54	10
M-REDSM5040	M50	M40	14,0	10,0	54	10
M-REDSM6332	M63	M32	14,0	10,0	65	10
M-REDSM6340	M63	M40	14,0	10,0	68	10
M-REDSM6350	M63	M50	14,0	10,0	68	10
M-REDSM7250	M72	M50	17,0	12,0	80	5
M-REDSM7263	M72	M63	15,0	10,0	81	5
M-REDSM7550	M75	M50	23,0	15,0	90	5
M-REDSM7563	M75	M63	23,0	15,0	90	5
M-REDSM8063	M80	M63	18,0	10,0	90	5
M-REDSM8072	M80	M72	18,0	10,0	90	5
M-REDSM8075	M80	M75	18,0	10,0	90	5

Zoll / gas

Art. Nr. art. no.	AG male	IG female	GL / IG mm	SW mm	VPE Stk. unit pcs.
M-REDSZ014018	1/4"	1/8"	6,0	20	50
M-REDSZ038014	3/8"	1/4"	6,0	20	50
M-REDSZ012014	1/2"	1/4"	8,0	24	50
M-REDSZ012038	1/2"	3/8"	8,0	24	50
M-REDSZ034038	3/4"	3/8"	8,0	30	50
M-REDSZ034012	3/4"	1/2"	8,0	30	50
M-REDSZ100012	1"	1/2"	11,0	35	25
M-REDSZ100034	1"	3/4"	11,0	35	25
M-REDSZ114034	1 1/4"	3/4"	-	45	10
M-REDSZ114100	1 1/4"	1"	11,0	45	10
M-REDSZ112100	1 1/2"	1"	-	51	5
M-REDSZ112114	1 1/2"	1 1/4"	11,0	51	5
M-REDSZ200100	2"	1"	-	64	5
M-REDSZ200112	2"	1 1/2"	11,0	64	5

- L Länge gesamt / overall length
- GL Gewindelänge / thread length
- AG Außengewinde / male thread
- IG Innengewinde / female thread
- SW Schlüsselweite / key-width
- H Höhe / height
- ID Innendurchmesser / inside diameter