

# M-FLW / M-FLWL



<b>Ausführung</b> construction	Flanschwinkel in kurzer oder langer Version flanged angle in short or long version
<b>Werkstoff</b> material	Zinkdruckguss die-cast zinc
<b>Temperatur</b> temperature	-20°C - +100°C
<b>Schutzart</b> protection	IP68 O-Ring flanschseitig o-ring flange sided

## M-FLW metrisch / metric

Art. Nr. art. no.	Gewinde thread	B mm	L mm	H mm	E mm	F mm	G mm	VPE Stk unit pcs.
M-FLWM16	M16	48,0	48,0	30,0	37,0	4,3	15,5	10
M-FLWM20	M20	53,0	56,0	35,0	44,0	5,5	18,0	10
M-FLWM25	M25	63,0	65,0	42,0	54,0	5,5	22,5	10
M-FLWM32	M32	70,0	75,0	52,0	60,0	5,5	27,0	5
M-FLWM40	M40	71,0	75,0	52,0	60,0	5,5	27,0	5
M-FLWM50	M50	89,0	93,0	69,0	72,0	6,5	33,5	2
M-FLWM63	M63	96,0	114,0	74,0	84,0	6,5	37,0	1

## M-FLW PG

Art. Nr. art. no.	Gewinde thread	B mm	L mm	H mm	E mm	F mm	G mm	VPE Stk unit pcs.
M-FLWPG09	PG09	45,0	48,0	30,0	37,0	4,3	15,5	10
M-FLWPG11	PG11	45,0	48,0	30,0	37,0	4,3	15,5	10
M-FLWPG13	PG13,5	53,0	56,0	35,0	44,0	5,5	19,0	10
M-FLWPG16	PG16	53,0	56,0	35,0	44,0	5,5	19,0	10
M-FLWPG21	PG21	63,0	65,0	42,0	54,0	5,5	23,0	5
M-FLWPG29	PG29	71,0	75,0	52,0	60,0	5,5	27,0	5
M-FLWPG36	PG36	89,0	94,0	69,0	72,0	6,5	34,0	2
M-FLWPG42	PG42	96,0	114,0	74,0	84,0	6,5	36,5	1
M-FLWPG48	PG48	96,0	114,0	74,0	84,0	6,5	37,0	1



## M-FLWL metrisch / metric

Art. Nr. art. no.	Gewinde thread	B mm	L mm	H mm	E mm	F mm	G mm	VPE Stk unit pcs.
M-FLWLM40	M40	84,0	170,0	71,5	68,0	6,5	33,0	1
M-FLWLM50	M50	84,0	170,0	71,5	68,0	6,5	33,0	1
M-FLWLM63	M63	95,0	203,0	84,0	74,0	6,5	38,0	1

## M-FLWL PG


Art. Nr. art. no.	Gewinde thread	B mm	L mm	H mm	E mm	F mm	G mm	VPE Stk unit pcs.
M-FLWLPG29	PG29	84,0	170,0	71,5	68,0	6,5	33,0	1
M-FLWLPG36	PG36	84,0	170,0	71,5	68,0	6,5	33,0	1
M-FLWLPG42	PG42	95,0	208,0	84,0	74,5	6,5	39,0	1
M-FLWLPG48	PG48	95,0	208,0	84,0	74,5	6,5	39,0	1

M-FLW

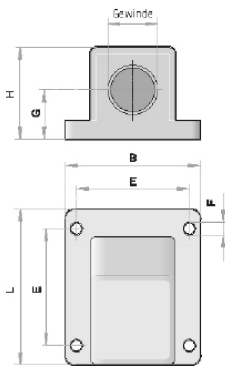

M-FLW

M-FLWL

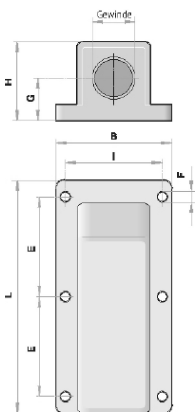

M-FLWL

