

# PC - CTS



<b>Ausführung</b> construction	Verbinder / Endkappe connector / sleeve	
<b>Werkstoff</b> material	Polyamid 6, UL94 V0 polyamide 6, UL94 V0	
<b>Temperatur</b> temperature	-40°C - +105°C	
<b>Schutzart</b> protection	IP66 / IP68 / IP69K	
<b>gemäß</b> according to	IEC EN 61386	
<b>Passende Wellrohre</b> suitable corrugated conduits	alle all	



CTS-Endtülle  
CTS-end sleeve




PC-Verbinder  
PC-connector

Art. Nr. IP68/69K art. no. IP68/69K	NW DN	Rohr STD pipe STD	ID mm	L mm	VPE Stk. unit pcs.
8*PC1216	12	16	14,0	60,6	50
8*PC1720	17	20	18,0	61,8	50
8*PC2325	23	25	22,5	72,0	30
8*PC2932	29	32	29,5	72,5	20
8*PC3640	36	40	37,5	86,0	20
8*PC4850	48	50	47,5	92,5	10

8B... = schwarz / black

8G... = grau / grey

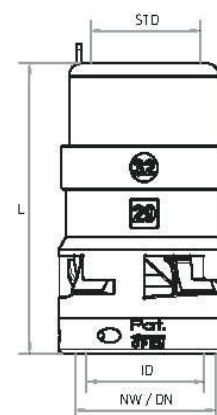

Art. Nr. schwarz art. no. black	NW DN	ID mm	L mm	VPE Stk. unit pcs.
BCTS07	7	4,0	15,4	100
BCTS10	10	6,9	15,4	100
BCTS12	12	9,5	18,4	100
BCTS17	17	12,9	20,4	100
BCTS23	23	19,2	21,4	50
BCTS29	29	24,7	22,4	50
BCTS36	36	32,8	24,4	30
BCTS48	48	44,3	25,4	20
BCTS56	56	53,5	26,4	10