

SR



RINA




Ausführung construction	Zugentlastung, starres Außengewinde strain relief, rigid male thread
Werkstoff material	Polyamid 6 polyamide 6
Temperatur temperature	-40°C - +105°C kurzz. / short term +150°C
Schutzart protection	IP68 / IP69K
gemäß according to	IEC EN 61386
Passende Wellrohre suitable corrugated conduits	alle all



Gewindeart metrisch

Art. Nr. schwarz art. no. black	Gewinde thread	Klemmbereich mm	NW DN	ID mm	GL mm	SW1 mm	SW2 mm	L mm	VPE Stk. unit pcs.
8BSR10M1607	M16	4,0 - 6,5	10	9,5	9	20	19	53,4	50
8BSR10M1608	M16	5,0 - 8,0	10	9,5	9	20	19	53,4	50
8BSR10M1609	M16	6,5 - 9,5	10	9,5	9	20	19	53,4	50
8BSR12M2007	M20	4,0 - 6,5	12	10,5	9	26	24	57,1	50
8BSR12M2008	M20	5,0 - 8,0	12	10,5	9	26	24	57,1	50
8BSR12M2009	M20	6,5 - 9,5	12	10,5	9	26	24	57,1	50
8BSR12M2011	M20	7,0 - 10,5	12	10,5	9	26	24	57,1	50
8BSR12M2013	M20	9,0 - 13,0	12	10,5	9	26	24	57,1	50
8BSR17M2007	M20	4,0 - 6,5	17	13,0	9	26	24	58,3	50
8BSR17M2008	M20	5,0 - 8,0	17	13,0	9	26	24	58,3	50
8BSR17M2009	M20	6,5 - 9,5	17	13,0	9	26	24	58,3	50
8BSR17M2011	M20	7,0 - 10,5	17	13,0	9	26	24	58,3	50
8BSR17M2013	M20	9,0 - 13,0	17	13,0	9	26	24	58,3	50
8BSR23M2511	M25	7,0 - 10,5	23	20,5	11	34	33	78,0	30
8BSR23M2513	M25	9,0 - 13,0	23	20,5	11	34	33	78,0	30
8BSR23M2516	M25	11,5 - 15,5	23	20,5	11	34	33	78,0	30
8BSR23M2518	M25	14,0 - 18,0	23	20,5	11	34	33	78,0	30
8BSR23M2520	M25	17,0 - 20,5	23	20,5	11	34	33	78,0	30
8BSR23M3216	M32	11,5 - 15,5	23	20,5	11	42	43	82,5	30
8BSR23M3218	M32	14,0 - 18,0	23	20,5	11	42	43	82,5	30
8BSR23M3220	M32	17,0 - 20,5	23	20,5	11	42	43	82,5	30
8BSR29M3218	M32	14,0 - 18,0	29	28,0	11	42	43	82,5	20
8BSR29M3220	M32	17,0 - 20,5	29	28,0	11	42	43	82,5	20
8BSR29M3225	M32	20,0 - 25,0	29	28,0	11	42	43	82,5	20
8BSR29M3228	M32	24,0 - 28,0	29	28,0	11	42	43	82,5	20
8BSR36M4032	M40	27,0 - 32,0	36	36,0	14	55	54	95,0	20
8BSR36M4034	M40	29,0 - 34,0	36	36,0	14	55	54	95,0	20
8BSR36M4036	M40	32,0 - 36,0	36	36,0	14	55	54	95,0	20
8BSR36M5032	M50	27,0 - 32,0	36	36,0	14	55	54	90,0	20
8BSR36M5034	M50	29,0 - 34,0	36	36,0	14	55	54	90,0	20
8BSR36M5036	M50	32,0 - 36,0	36	36,0	14	55	54	90,0	20

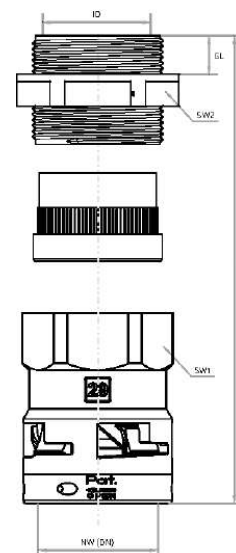

SR



RINA



Ausführung construction	Zugentlastung, starres Außengewinde strain relief, rigid male thread
Werkstoff material	Polyamid 6 polyamide 6
Temperatur temperature	-40°C - +105°C kurzz. / short term +150°C
Schutzart protection	IP68 / IP69K
gemäß according to	IEC EN 61386
Passende Wellrohre suitable corrugated conduits	alle all



Gewindeart PG

Art. Nr. schwarz art. no. black	Gewinde thread	Klemmbereich mm	NW DN	ID mm	GL mm	SW1 mm	SW2 mm	L mm	VPE Stk. unit pcs.
8BSR07P0707	PG7	4,0 - 6,5	7	6,2	8,0	17	16	50,5	100
8BSR10P0707	PG7	4,0 - 6,5	10	6,2	8,0	17	16	51,9	50
8BSR10P0907	PG9	4,0 - 6,5	10	9,5	9,0	20	19	53,4	50
8BSR10P0908	PG9	5,0 - 8,0	10	9,5	9,0	20	19	53,4	50
8BSR10P0909	PG9	6,5 - 9,5	10	9,5	9,0	20	19	53,4	50
8BSR12P1107	PG11	4,0 - 6,5	12	10,5	9,0	24	22	57,2	50
8BSR12P1108	PG11	5,0 - 8,0	12	10,5	9,0	24	22	57,2	50
8BSR12P1109	PG11	6,5 - 9,5	12	10,5	9,0	24	22	57,2	50
8BSR12P1111	PG11	7,0 - 10,5	12	10,5	9,0	24	22	57,2	50
8BSR12P1307	PG13,5	4,0 - 6,5	12	13,0	9,0	26	24	57,1	50
8BSR12P1308	PG13,5	5,0 - 8,0	12	13,0	9,0	26	24	57,1	50
8BSR12P1309	PG13,5	6,5 - 9,5	12	13,0	9,0	26	24	57,1	50
8BSR12P1311	PG13,5	7,0 - 10,5	12	13,0	9,0	26	24	57,1	50
8BSR12P1313	PG13,5	9,0 - 13,0	12	13,0	9,0	26	24	57,1	50
8BSR17P1307	PG13,5	4,0 - 6,5	17	13,0	9,0	26	24	58,3	50
8BSR17P1308	PG13,5	5,0 - 8,0	17	13,0	9,0	26	24	58,3	50
8BSR17P1309	PG13,5	6,5 - 9,5	17	13,0	9,0	26	24	58,3	50
8BSR17P1311	PG13,5	7,0 - 10,5	17	13,0	9,0	26	24	58,3	50
8BSR17P1313	PG13,5	9,0 - 13,0	17	13,0	9,0	26	24	58,3	50
8BSR17P1607	PG16	4,0 - 6,5	17	15,5	9,5	27	27	57,8	50
8BSR17P1608	PG16	5,0 - 8,0	17	15,5	9,5	27	27	57,8	50
8BSR17P1609	PG16	6,5 - 9,5	17	15,5	9,5	27	27	57,8	50
8BSR17P1611	PG16	7,0 - 10,5	17	15,5	9,5	27	27	57,8	50
8BSR17P1613	PG16	9,0 - 13,0	17	15,5	9,5	27	27	57,8	50
8BSR17P1616	PG16	11,5 - 15,5	17	15,5	9,5	27	27	57,8	50
8BSR23P2111	PG21	7,0 - 10,5	23	20,5	11,0	34	33	74,0	30
8BSR23P2113	PG21	9,0 - 13,0	23	20,5	11,0	34	33	74,0	30
8BSR23P2116	PG21	11,5 - 15,5	23	20,5	11,0	34	33	74,0	30
8BSR23P2118	PG21	14,0 - 18,0	23	20,5	11,0	34	33	74,0	30
8BSR23P2120	PG21	17,0 - 20,5	23	20,5	11,0	34	33	74,0	30
8BSR23P2916	PG29	11,5 - 15,5	23	20,5	11,5	42	43	78,0	30
8BSR23P2918	PG29	14,0 - 18,0	23	20,5	11,5	42	43	78,0	30
8BSR23P2920	PG29	17,0 - 20,5	23	20,5	11,5	42	43	78,0	30
8BSR29P2918	PG29	14,0 - 18,0	29	28,0	11,5	42	43	78,0	20
8BSR29P2920	PG29	17,0 - 20,5	29	28,0	11,5	42	43	78,0	20
8BSR29P2925	PG29	20,0 - 25,0	29	28,0	11,5	42	43	78,0	20
8BSR29P2928	PG29	24,0 - 28,0	29	28,0	11,5	42	43	78,0	20
8BSR36P3632	PG36	27,0 - 32,0	36	36,0	14,0	55	54	90,0	20
8BSR36P3634	PG36	29,0 - 34,0	36	36,0	14,0	55	54	90,0	20
8BSR36P3636	PG36	32,0 - 36,0	36	36,0	14,0	55	54	90,0	20
8BSR48P4844	PG48	39,0 - 44,0	48	44,0	14,0	70	67	99,5	10

