

## C2S-C4




<b>Ausführung</b> construction	Abzweigkasten junction box
<b>Werkstoff</b> material	Aluguss aluminium die cast
<b>Dichtung</b> sealing	TPE
<b>Temperatur</b> temperature	-40°C - +100°C°
<b>Schutzart</b> protection	IP65
<b>Gemäß</b> according to	IEC EN 61386



Art. Nr. M art. no. M	metrisch metric	Art. Nr. PG art. no. PG	PG PG	Art. Nr. Zoll art. no. GAS	Zoll GAS	A mm	B mm	C mm	VPE Stk. unit pcs.
		<b>C2S10009</b>	PG09	<b>C2S010001</b>	1/4"	82	46	34	10
<b>C2S1000M16</b>	M16	<b>C2S100011</b>	PG11	<b>C2S010002</b>	3/8"	82	46	34	10
<b>C2S1010M20</b>	M20	<b>C2S101013</b>	PG13,5	<b>C2S010101</b>	1/2"	115	59	44	10
		<b>C2S101016</b>	PG16			115	59	44	10
<b>C2S1010M25</b>	M25	<b>C2S101021</b>	PG21	<b>C2S010102</b>	3/4"	115	59	44	10
<b>C2S1020M32</b>	M32	<b>C2S102029</b>	PG29	<b>C2S01020</b>	1"	128	76	54	5
<b>C2S1030M40</b>	M40			<b>C2S010301</b>	1 1/4"	146	95	70	5
<b>C2S1030M50</b>	M50	<b>C2S103036</b>	PG36	<b>C2S010302</b>	1 1/2"	146	95	70	5
		<b>C2S104048</b>	PG48	<b>C2S010402</b>	2"	160	110	80	2
				<b>C2S01050</b>	2 1/2"	276	144	102	1
				<b>C2S01060</b>	3"	276	144	118	1

**C2S - 2 Ausgänge / nach links**  
C2S - 2 exits / to the left

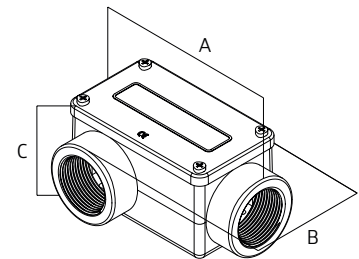

Art. Nr. M art. no. M	metrisch metric	Art. Nr. PG art. no. PG	PG PG	Art. Nr. Zoll art. no. GAS	Zoll GAS	A mm	B mm	C mm	VPE Stk. unit pcs.
		<b>C46009</b>	PG09	<b>C406001</b>	1/4"	94	57	34	10
<b>C4600M16</b>	M16	<b>C460011</b>	PG11	<b>C406002</b>	3/8"	94	57	34	10
<b>C4610M20</b>	M20	<b>C461013</b>	PG13,5	<b>C406101</b>	1/2"	130	74	44	10
		<b>C461016</b>	PG16			130	74	44	10
<b>C4610M25</b>	M25	<b>C461021</b>	PG21	<b>C406102</b>	3/4"	130	74	44	10
<b>C4620M32</b>	M32	<b>C462029</b>	PG29	<b>C40620</b>	1"	150	97	54	5
<b>C4630M40</b>	M40			<b>C406301</b>	1 1/4"	170	120	70	5
<b>C4630M50</b>	M50	<b>C463036</b>	PG36	<b>C406302</b>	1 1/2"	170	120	70	5
		<b>C464048</b>	PG48	<b>C406402</b>	2"	190	140	80	2
				<b>C40650</b>	2 1/2"	310	178	102	1
				<b>C40660</b>	3"	310	178	118	1

**C4 - 4 Ausgänge**  
C4 - 4 exits

