





HJT-M

Ausführung construction	Metrisch metric
Werkstoff material	Messing vernickelt nickel-plated brass
Temperatur temperature	-50°C - +300°C
Schutzart protection	IP 54
Gemäß according to	IEC EN 61386

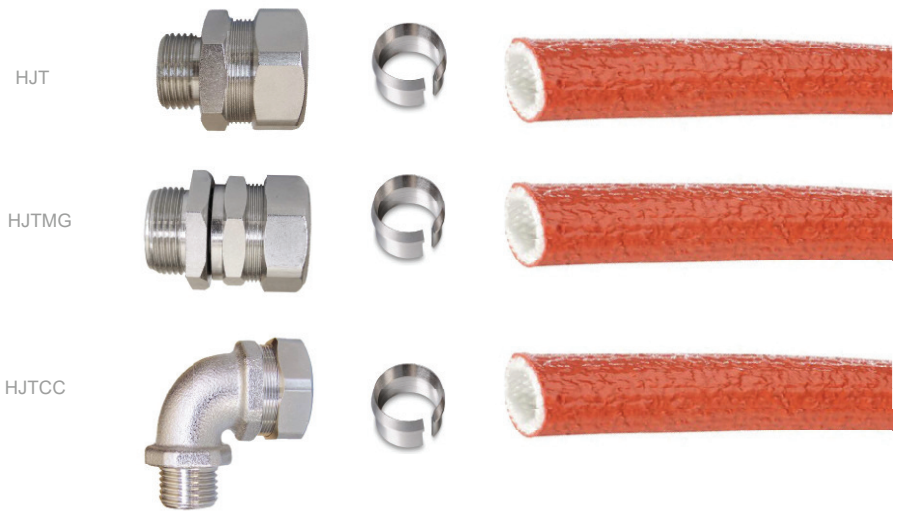


starr / rigid

Art. Nr. art. no.	Gewinde thread	Schlauch NW conduit DN	ID mm	SW1 mm	SW2 mm	GL mm	VPE Stk. unit pcs.
HJT10M16	M16	10	10,5	24	26	10	20
HJT10M20	M20	10	10,5	24	26	10	20
HJT12M16	M16	12	10,5	24	26	10	20
HJT12M20	M20	12	10,5	24	26	10	20
HJT15M20	M20	15	13,8	28	30	10	20
HJT15M25	M25	15	13,8	28	30	10	20
HJT2022M25	M25	20-22	18,5	35	38	12	10
HJT25M32	M32	27	25,0	42	45	12	10
HJT3XM40	M40	30-32-33-35	33,0	50	53	12	5
HJT40M50	M50	40	37,5	58	61	13	5
HJT50M63	M63	50	48,0	70	74	16	2



drehbar / swivelling

Art. Nr. art. no.	Gewinde thread	Schlauch NW conduit DN	ID mm	SW1 mm	SW2 mm	SW3 mm	GL mm	VPE Stk. unit pcs.
HJTMG10M16	M16	10	10,5	19	24	26	9	20
HJTMG10M20	M20	10	10,5	24	24	26	9	20
HJTMG12M16	M16	12	10,5	19	24	26	9	20
HJTMG12M20	M20	12	10,5	24	24	26	9	20
HJTMG15M20	M20	15	13,8	24	28	30	9	20
HJT15M25	M25	15	13,8	30	28	30	10	20
HJT2022M25	M25	20-22	18,5	30	35	28	10	10
HJT25M32	M32	27	25,0	38	42	45	13	10
HJT3XM40	M40	30-32-33-35	33,0	45	50	53	18	5
HJT40M50	M50	40	37,5	52	58	61	20	5
HJT50M63	M63	50	48,0	64	70	74	24	2



90°

Art. Nr. art. no.	Gewinde thread	Schlauch NW conduit DN	ID mm	SW1 mm	SW2 mm	GL mm	L1 mm	VPE Stk. unit pcs.
HJTCC10M16	M16	10	10,5	26	26	12	14	20
HJTCC10M20	M20	10	10,5	26	26	12	14	20
HJTCC12M16	M16	12	10,5	26	26	12	14	20
HJTCC12M20	M20	12	10,5	26	26	12	14	20
HJTCC15M20	M20	15	13,8	28	28	12	14	20
HJTCC2022M25	M25	20-22	18,5	35	38	13	19,5	10
HJTCC25M32	M32	25	25,0	42	45	16	23,5	10

