


PPDC

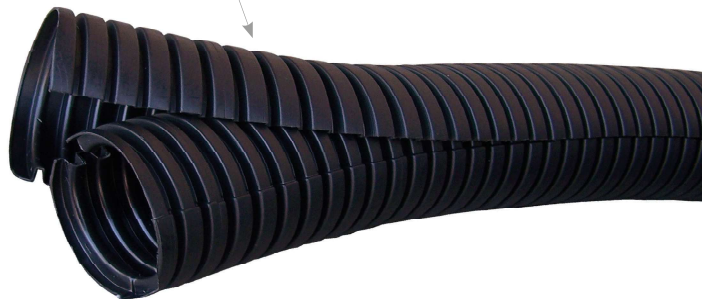

HF

Ausführung construction	Standardprofil, mittelschwer, teilbar standard profile, medium heavy, separable	
Werkstoff material	PP mod. UL94 V0 (PPDC) PP mod. UL94 V2 (PPDC-L)	
Temperatur temperature	-40°C - +135°C kurzz. / short term +150°C	
Schutzart protection	IP54	
gemäß according to	IEC EN 61386	
Passende Verschraubungen suitable fittings	JAW-FIT-System	ab Seite 60
Seite page	LCO-System	

Wellrohr PP, schwarz, teilbar
corrugated tube PP, black, separableEigenschaften
properties

flexibel - hohe Scheiteldruckfestigkeit - selbstverlöschend - UV-beständig - halogenfrei - flammwidrig
benzinbeständig - gute Ölbeständigkeit - gute Säurebeständigkeit - silikon- und cadmiumfrei
flexible - high compressive strength - self extinguishing - UV-resistant - free of halogene - flame retardant
petrol resistant - oil resistant - acid resistant - free of silicone and cadmium

Anwendungen
applicationMaschinenbau
machine-building ✓Elektroinstallation
electro-installation ✓Fahrzeugbau
automotive ✓EMV-Anwendungen
EMC-applicationAutomation
automation ✓Bahn
railway ✓Schiffsbau
shipbuilding ✓EX-Anwendungen
EX-application

Art. Nr. schwarz art. no. black	Art. Nr. grau art. no. grey	NW DN	ID mm	AD mm OD mm	Biegeradius mm bending radius mm	VPE unit
PPDC06	a.A.	6	6,3	10,0	15	50m
PPDC10	a.A.	10	8,7	13,6	15	50m
PPDC11	a.A.	11	11,0	16,1	15	50m
PPDC14	a.A.	14	12,5	18,5	20	50m
PPDC16	a.A.	16	16,0	21,5	20	50m
PPDC20	a.A.	20	19,5	25,5	25	50m
PPDC23	a.A.	23	24,2	31,0	35	50m
PPDC29	a.A.	29	27,3	35,5	35	25m
PPDC37	a.A.	37	31,0	41,4	40	25m
PPDC45	a.A.	45	42,7	54,0	70	25m
PPDC70	a.A.	70	66,0	79,8	95	10m

Art. Nr. schwarz art. no. black	Art. Nr. grau art. no. grey	NW DN	ID mm	AD mm OD mm	Biegeradius mm bending radius mm	VPE unit
PPDC06-L	a.A.	6	6,2	11,2	15	50m
PPDC10-L	a.A.	10	7,9	12,9	15	50m
PPDC12-L	a.A.	12	10,3	15,8	15	50m
PPDC17-L	a.A.	17	13,9	21,0	20	50m
PPDC23-L	a.A.	23	20,5	28,3	20	50m
PPDC29-L	a.A.	29	26,6	34,5	35	25m
PPDC36-L	a.A.	36	32,0	41,8	40	25m
PPDC48-L	a.A.	48	43,0	54,2	70	25m