


## TM-SPLIT

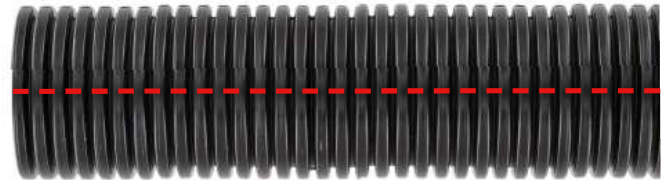

HF

|                                                      |                                                              |               |
|------------------------------------------------------|--------------------------------------------------------------|---------------|
| <b>Ausführung</b><br>construction                    | Standardprofil, geschlitzt<br>standard profile, splitted     |               |
| <b>Werkstoff</b><br>material                         | Polyamid 6 (PA6)<br>UL94 HB<br>polyamide 6 (PA6)<br>UL 94 HB |               |
| <b>Temperatur</b><br>temperature                     | -40°C - +120°C<br>kurzz. / short term +150°C                 |               |
| <b>Schutzart</b><br>protection                       | -                                                            |               |
| <b>gemäß</b><br>according to                         | IEC EN 61386                                                 |               |
| <b>Passende Verschraubungen</b><br>suitable fittings | JAW-FIT-System                                               | ab Seite .... |
| <b>Seite</b><br>page                                 |                                                              |               |

Wellrohr PA6, schwarz oder grau  
corrugated conduit PA6, black or greyEigenschaften  
properties

flexibel - hohe Scheiteldruckfestigkeit - flüssigkeitsdicht - selbstverlöschend - UV-beständig - halogenfrei  
benzinbeständig - gute Ölbeständigkeit - gute Säurebeständigkeit - silikon- und cadmiumfrei - internationale Zulassung  
flexible - high compressive strength - liquid tight - self extinguishing - UV-resistant - free of halogens - flame retardant  
petrol resistant - oil resistant - acid resistant - free of silicone and cadmium - international approval

Anwendungen  
applicationMaschinenbau  
machine-building ✓Elektroinstallation  
electro-installation ✓Fahrzeugbau  
automotive ✓EMV-Anwendungen  
EMC-applicationAutomation  
automation ✓Bahn  
railwaySchiffsbau  
shipbuilding ✓EX-Anwendungen  
EX-application

| Art. Nr. schwarz<br>art. no. black | Art. Nr. grau<br>art. no. grey | NW<br>DN | ID<br>mm | AD mm<br>OD mm | Biegeradius mm<br>bending radius mm | VPE<br>unit |
|------------------------------------|--------------------------------|----------|----------|----------------|-------------------------------------|-------------|
| TM104B                             | a. A.                          | 4,5      | 4,3      | 7,3            | 8                                   | 100m        |
| TM107B                             | a. A.                          | 7        | 6,7      | 10,0           | 13                                  | 50m         |
| TM108B                             | a. A.                          | 8,5      | 8,4      | 11,7           | 15                                  | 50m         |
| TM110B                             | a. A.                          | 10       | 9,9      | 13,0           | 20                                  | 50m         |
| TM112B                             | a. A.                          | 12       | 12,2     | 15,7           | 30                                  | 50m         |
| TM113B                             | a. A.                          | 13       | 12,7     | 15,8           | 35                                  | 50m         |
| TM114B                             | a. A.                          | 14       | 14,2     | 18,5           | 40                                  | 50m         |
| TM116B                             | a. A.                          | 16       | 14,9     | 18,9           | 40                                  | 50m         |
| TM117B                             | a. A.                          | 17       | 16,6     | 21,2           | 45                                  | 50m         |
| TM119B                             | a. A.                          | 19       | 19,3     | 24,3           | 45                                  | 50m         |
| TM122B                             | a. A.                          | 22       | 21,2     | 25,5           | 50                                  | 50m         |
| TM123B                             | a. A.                          | 23       | 23,2     | 28,3           | 55                                  | 50m         |
| TM126B                             | a. A.                          | 26       | 25,7     | 32,2           | 60                                  | 50m         |
| TM129B                             | a. A.                          | 29       | 29,0     | 34,5           | 65                                  | 25m         |
| TM136B                             | a. A.                          | 36       | 36,0     | 42,4           | 90                                  | 25m         |
| TM148B                             | a. A.                          | 50       | 48,1     | 53,8           | 100                                 | 25m         |
| TM156B                             | a. A.                          | 56       | 56,3     | 67,2           | 130                                 | 30m         |
| TM165B                             | a. A.                          | 65       | 62,7     | 73,5           | 145                                 | 25m         |
| TM170B                             | a. A.                          | 70       | 67,5     | 80,0           | 160                                 | 10m         |
| TM195B                             | a. A.                          | 95       | 91,5     | 106,0          | 210                                 | 10m         |