

UBF



Ausführung construction	Bogen 45°, starres Außengewinde elbow 45°, rigid male thread	
Werkstoff material	Polyamid 6 polyamide 6	
Temperatur temperature	-40°C - +105°C kurzz. / short term +150°C	
Schutzart protection	IP66 / 68 / IP69K	
gemäß according to	IEC EN 61386	
Passende Wellrohre suitable corrugated conduits	alle all	




inkl. Gegenmutter
locknut included

Gewindeart metrisch

Art. Nr. IP66 art. no. IP66	Art. Nr. IP68/69K art. no. IP68/69K	Gewinde thread	NW DN	ID mm	GL mm	L mm	VPE Stk. unit pcs.
U6*BF17M20	U8*BF17M20	M20	17	13,8	12	65,0	50
U6*BF23M25	U8*BF23M25	M25	23	18,0	12	78,3	30
U6*BF29M32	U8*BF29M32	M32	29	23,7	13	86,2	20
U6*BF36M40	U8*BF36M40	M40	36	31,8	15	101,8	20
U6*BF36M50	U8*BF36M50	M50	36	36,0	15	105,3	20
U6*BF48M50	U8*BF48M50	M50	48	39,8	15	119,3	10
U6*BF48M63	U8*BF48M63	M63	48	47,8	15	123,5	10

6B... = Schwarz / black

6G... = grau / grey

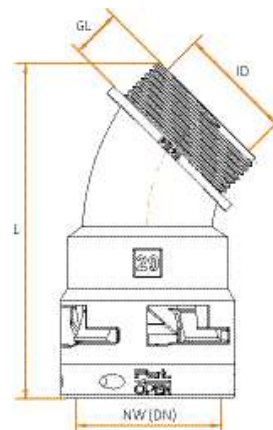

Gewindeart PG

Art. Nr. IP66 art. no. IP66	Art. Nr. IP68/69K art. no. IP68/69K	Gewinde thread	NW DN	ID mm	GL mm	L mm	VPE Stk. unit pcs.
U6*BF17N03	U8*BF17N03	1/2" NPT	17	13,8	13,5	65,5	50
U6*BF23N04	U8*BF23N04	3/4" NPT	23	18,0	14,0	79,7	30
U6*BF29N05	U8*BF29N05	1" NPT	29	23,7	17,3	88,8	20
U6*BF36N06	U8*BF36N06	1" 1/4 NPT	36	31,8	18,0	103,6	20
U6*BF48N08	U8*BF48N08	2" NPT	48	47,8	19,0	124,4	10

Gewindeart PG

Art. Nr. IP66 art. no. IP66	Art. Nr. IP68/69K art. no. IP68/69K	Gewinde thread	NW DN	ID mm	GL mm	L mm	VPE Stk. unit pcs.
U6*BF17P13	U8*BF17P13	PG13,5	17	13,8	12	65,3	50
U6*BF17P16	U8*BF17P16	PG16	17	16,4	12	66,0	50
U6*BF23P21	U8*BF23P21	PG21	23	21,7	12	79,5	30
U6*BF29P29	U8*BF29P29	PG29	29	29,1	13	88,2	20
U6*BF36P36	U8*BF36P36	PG36	36	36,0	13	102,6	20
U6*BF48P48	U8*BF48P48	PG48	48	47,8	13	121,0	10