



K-UNI DICHT

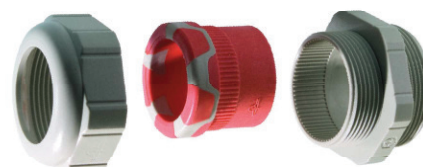

Ausführung construction	Standard standard
Werkstoff material	Polyamid 6 / TPE polyamide 6 / TPE
Temperatur temperature	-20°C - +100°C
Kurzzeitig short term	-
Schutzart protection	IP68
Besonderheit: specials:	Vollgummi Dichteinsatz solid rubber insert



Gewindeart metrisch

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW mm	H mm	GL mm	VPE Stk. unit pcs.
K-UNIM1207	M12	4,0 - 6,5	15	30,0	8,0	50
K-UNIM1607	M16	4,0 - 6,5	19	31,0	9,0	50
K-UNIM1608	M16	5,0 - 8,0	19	31,0	9,0	50
K-UNIM1610	M16	6,5 - 9,5	19	31,0	9,0	50
K-UNIM2007	M20	4,0 - 6,5	24	31,0	9,0	50
K-UNIM2008	M20	5,0 - 8,0	24	31,0	9,0	50
K-UNIM2010	M20	6,5 - 9,5	24	31,0	9,0	50
K-UNIM2011	M20	7,0 - 10,5	24	31,0	9,0	50
K-UNIM2013	M20	9,0 - 13,0	24	31,0	9,0	50
K-UNIM2507	M25	4,0 - 6,5	30	32,0	9,0	50
K-UNIM2508	M25	5,0 - 8,0	30	32,0	9,0	50
K-UNIM2510	M25	6,5 - 9,5	30	32,0	9,0	50
K-UNIM2511	M25	7,0 - 10,5	30	32,0	9,0	50
K-UNIM2513	M25	9,0 - 13,0	30	32,0	9,0	50
K-UNIM2516	M25	11,5 - 15,5	30	32,0	9,0	50
K-UNIM3211	M32	7,0 - 10,5	36	38,0	11,0	25
K-UNIM3213	M32	9,0 - 13,0	36	38,0	11,0	25
K-UNIM3216	M32	11,5 - 15,5	36	38,0	11,0	25
K-UNIM3218	M32	14,0 - 18,0	36	38,0	11,0	25
K-UNIM3221	M32	17,0 - 20,5	36	38,0	11,0	25
K-UNIM4016	M40	11,5 - 15,5	46	45,5	11,5	10
K-UNIM4018	M40	14,0 - 18,0	46	45,5	11,5	10
K-UNIM4021	M40	17,0 - 20,5	46	45,5	11,5	10
K-UNIM4025	M40	20,0 - 25,0	46	45,5	11,5	10
K-UNIM4028	M40	24,0 - 28,0	46	45,5	11,5	10
K-UNIM5032	M50	27,0 - 32,0	56	48,0	14,0	5
K-UNIM5034	M50	29,0 - 34,0	56	48,0	14,0	5
K-UNIM5036	M50	32,0 - 36,0	56	48,0	14,0	5

Auch in schwarz und mit Mehrfachdichteinsätzen lieferbar.
Also available in black and with multiple sealing inserts.

Gewindeart PG

Art. Nr. art. no.	Gewinde thread	für Kabel for cable	SW mm	H mm	GL mm	VPE Stk. unit pcs.
K-UNIPG0707	PG07	4,0 - 6,5	15	31,0	8,0	50
K-UNIPG0907	PG09	4,0 - 6,5	19	32,0	9,0	50
K-UNIPG0908	PG09	5,0 - 8,0	19	32,0	9,0	50
K-UNIPG0910	PG09	6,5 - 9,5	19	32,0	9,0	50
K-UNIPG1107	PG11	4,0 - 6,5	22	33,0	9,0	50
K-UNIPG1108	PG11	5,0 - 8,0	22	33,0	9,0	50
K-UNIPG1110	PG11	6,5 - 9,5	22	33,0	9,0	50
K-UNIPG1111	PG11	7,0 - 10,5	22	33,0	9,0	50
K-UNIPG1307	PG13,5	4,0 - 6,5	24	33,0	9,0	50
K-UNIPG1308	PG13,5	5,0 - 8,0	24	33,0	9,0	50
K-UNIPG1310	PG13,5	6,5 - 9,5	24	33,0	9,0	50
K-UNIPG1311	PG13,5	7,0 - 10,5	24	33,0	9,0	50
K-UNIPG1313	PG13,5	9,0 - 13,0	24	33,0	9,0	50
K-UNIPG1607	PG16	4,0 - 6,5	27	33,0	9,0	50
K-UNIPG1608	PG16	5,0 - 8,0	27	33,0	9,0	50
K-UNIPG1610	PG16	6,5 - 9,5	27	33,0	9,0	50
K-UNIPG1611	PG16	7,0 - 10,5	27	33,0	9,0	50
K-UNIPG1613	PG16	9,0 - 13,0	27	33,0	9,0	50
K-UNIPG1616	PG16	11,5 - 15,5	27	33,0	9,0	50
K-UNIPG2111	PG21	7,0 - 10,5	33	40,0	11,0	25
K-UNIPG2113	PG21	9,0 - 13,0	33	40,0	11,0	25
K-UNIPG2116	PG21	11,5 - 15,5	33	40,0	11,0	25
K-UNIPG2118	PG21	14,0 - 18,0	33	40,0	11,0	25
K-UNIPG2121	PG21	17,0 - 20,5	33	40,0	11,0	25
K-UNIPG2913	PG29	9,0 - 13,0	43	44,0	11,0	10
K-UNIPG2916	PG29	11,5 - 15,5	43	44,0	11,0	10
K-UNIPG2918	PG29	14,0 - 18,0	43	44,0	11,0	10
K-UNIPG2921	PG29	17,0 - 20,5	43	44,0	11,0	10
K-UNIPG2925	PG29	20,0 - 25,0	43	44,0	11,0	25
K-UNIPG2928	PG29	24,0 - 28,0	43	44,0	11,0	25
K-UNIPG3632	PG36	27,0 - 32,0	53	47,0	14,0	10
K-UNIPG3634	PG36	29,0 - 34,0	53	47,0	14,0	10
K-UNIPG3636	PG36	32,0 - 36,0	53	47,0	14,0	10